

lab01

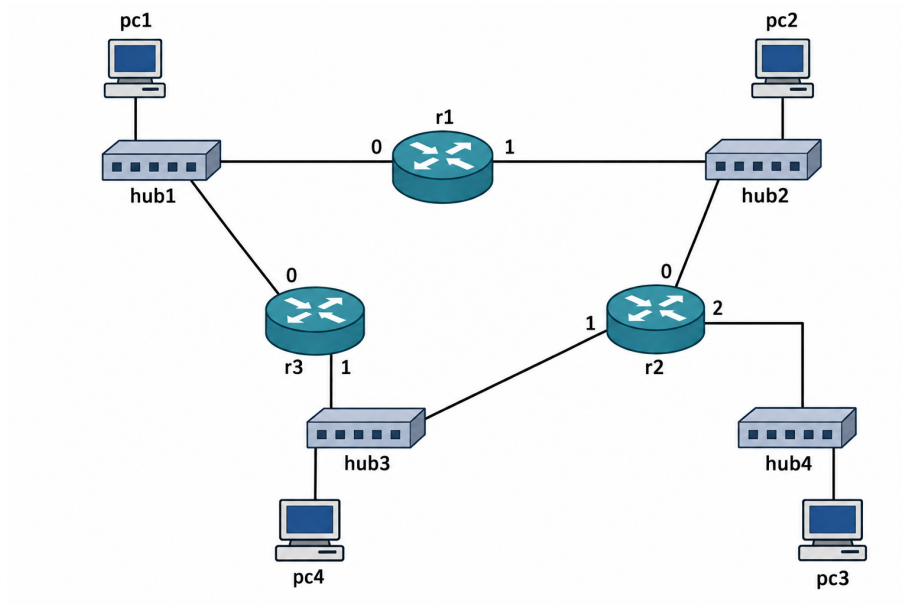


Figure 1: lab01

hub1 pc1 (200.0.0.10)
pc4 (200.0.0.40)
r1:eth0 (200.0.0.1)
r3:eth0 (200.0.0.3)

hub2 r1:eth1 (201.0.0.1)
r2:eth0 (201.0.0.2)

hub3 r2:eth1 (202.0.0.2)
r3:eth1 (202.0.0.3)
pc2 (202.0.0.20)

hub4 r2:eth2 (203.0.0.2)
pc3 (203.0.0.30)

Rutas estáticas configuradas en `/etc/network/interfaces` de cada router:

Router	Red destino	Via	Interfaz
r1	202.0.0.0/24	201.0.0.2	eth1
r1	203.0.0.0/24	201.0.0.2	eth1
r2	200.0.0.0/24	201.0.0.1	eth0
r2	202.0.0.0/16	201.0.0.1	eth0
r2	default	202.0.0.3	eth1
r3	201.0.0.0/24	200.0.0.1	eth0
r3	203.0.0.0/24	202.0.0.2	eth1
r3	default	202.0.0.2	eth1